

A-rated Legend door option

energy efficient for warmer homes



New **A-rated door option**
for **Legend Ovolo** and **Chamfered** systems

legend**70**
Chamfered

legend**70**
Ovolo

 synseal[®]

Tel: 01623 443200 www.synseal.com



A-rated Legend door option

energy efficient for warmer homes

Synseal are now able to offer an A-rated door energy rating option on the Legend profile system. For fully glazed single doors, a 40mm triple glazing unit comprising of two panes of low-e glass, argon gas fill, and warm edge spacer bar is used; all of which are off-the-shelf IGU options from Global Glass.

The A-rated door option is available for both Legend Chamfered and Legend Ovolo systems.

The door keeps its full steel reinforcement so it is suitable for all colour options. The new multi-chamber large (door) outer frame (5F6 / 9F6) is the result of continuous profile development and makes it possible to give the option of full steel reinforcement.

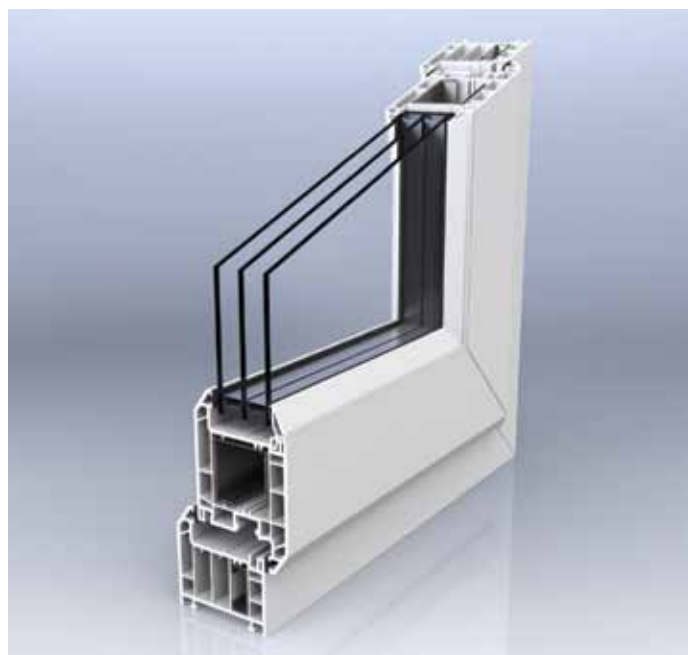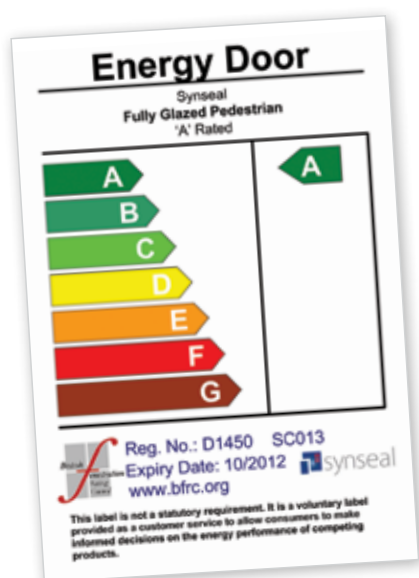

Ref No.	Description	Length
5F6	Multi-chambered outer frame - Chamfered	6m
9F6	Multi-chambered outer frame - Ovolo	6m

Technical information:

- Legend Chamfered specification: 5F6 outer frame / 5DV1 door vent, full steel reinforcement, 5DV2 midrail (empty)
- Legend Ovolo specification: 9F6 outer frame / 9DV1 door vent, full steel reinforcement, 9DV2 midrail (empty)
- Glazing unit: 40mm (4/14/4/14/4): 2x Planitherm ONE II/Edgetech Superspacer with 90% Argon/1x clear

Note: Global Glass currently quotes a 15 working day lead-time on this glazing unit; Prices on application



Synseal Extrusions Ltd. Common Road,
Huthwaite, Nottinghamshire, NG17 6AD

Tel: 01623 443200 www.synseal.com